

Hand blast cabinet CSMG


Artikel-Nr. 35656

Pretreated surfaces have proven their worth in tool coating, as they are an important prerequisite for coating quality.

Experten kontaktieren

+49 2405 44 70 122

coatingtechnology@cemecon.de

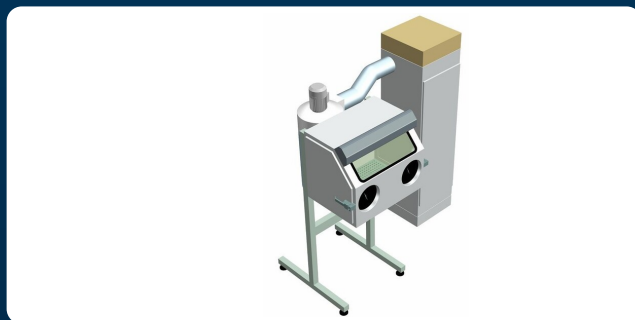

Technische Daten

| | |
|---------------------|--|
| Process step | radiate |
| Coating procedure | Pretreatment |
| Type | CSMG 25S |
| Net weight | 200 kg |
| measurement (LxWxH) | 660 x 700 x 1560 mm DUST COLLECTOR: 520 X 500 X 1500 MM |
| Connector | 400V/50Hz; 3 Ph+N+PE |
| Connected Load (KW) | 1,7 |
| Ampere | 16 A |

The practical CSMG manual injector blasting unit ensures smooth surfaces on all carbide, HSS tools and components. Its self-cleaning filter system contributes to the user-friendliness of the entire unit.

Scope of delivery

- 1 CSMG manual blasting unit incl. dust separator
- 1 Installation set
- Initial filling glass beads
- 1 Manual