


Hand blast cabinet CSMG

Item no. 35656


Pretreated surfaces have proven their worth in tool coating, as they are an important prerequisite for coating quality.

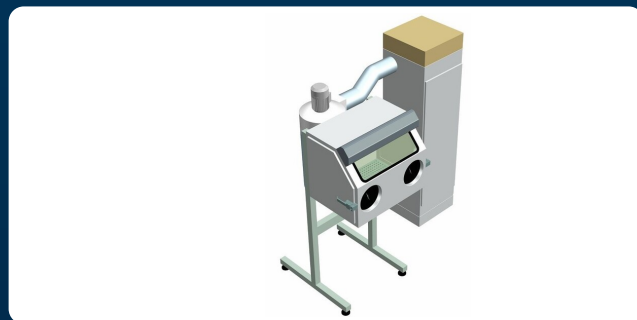


Specifications

Process step	radiate
Coating procedure	Pretreatment
Type	CSMG 25S
Net weight	200 kg
measurement (LxWxH)	660 x 700 x 1560 mm DUST COLLECTOR: 520 X 500 X 1500 MM
Connector	400V/50Hz; 3 Ph+N+PE
Connected Load (KW)	1,7
Ampere	16 A

Contact experts

 +49 2405 44 70 122

 coatingtechnology@cemecon.de

The practical CSMG manual injector blasting unit ensures smooth surfaces on all carbide, HSS tools and components. Its self-cleaning filter system contributes to the user-friendliness of the entire unit.

Scope of delivery

- 1 CSMG manual blasting unit incl. dust separator
- 1 Installation set
- Initial filling glass beads
- 1 Manual